查询FT1000A供应商

POWEREX

FT1000A

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

Phase Control SCR
1000 Amperes Avg
800-2500 Volts

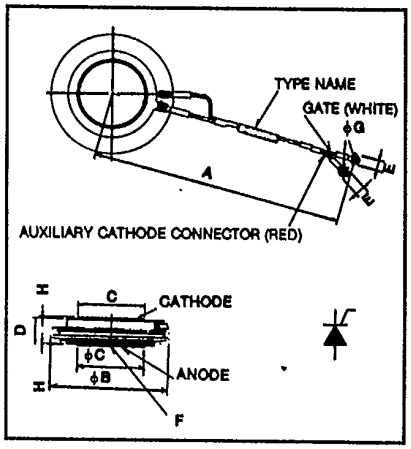

FT1000A
Outline Drawing

Dimensions	Inches	Metric
A	11.62 ± .40	295 ± 10
ϕB	3.622	92
ϕC	1.968	50
D	.83 ± .02	21 ± 0.5
E	.30	7.5
F	M5	M5 × 0.8
ϕG	.169	4.3
H	.015 Min	0.4 Min

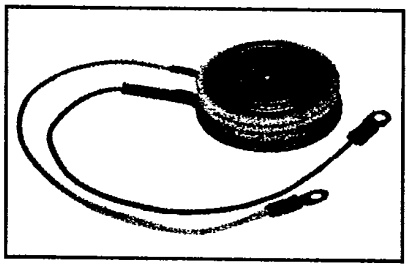

FT1000A
Phase Control SCR
1000 Amperes/800-2500 Volts

Description
Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

Features:
- ☐ Low On-State Voltage
- ☐ High di/dt
- ☐ High dv/dt
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I^2t Ratings

Applications:
- ☐ Power Supplies
- ☐ Battery Chargers
- ☐ Motor Control
- ☐ Light Dimmers
- ☐ VAR Generators

Ordering Information
Example: Select the complete nine digit part number you desire from the table – i.e. FT1000A-20 is a 1000 Volt, 1000 Ampere Phase Control SCR.

Type	Voltage*		Current
	V_{DRM} V_{RRM}	Code	I_T (avg)
FT1000A	800	-16	1000
	1000	-20	
	1200	-24	
	1400	-28	
	1600	-32	
	1800	-36	
	2000	-40	
	2500	-50	

*Voltage classes 32, 40, and 50 are standard products.

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT1000A
Phase Control SCR
1000 Amperes Avg/800-2500 Volts

Absolute Maximum Ratings

	Symbol	FT1000A	Units
RMS On-State Current	$I_{T(RMS)}$	1550	Amperes
Average On-State Current	$I_{T(av)}$	1000	Amperes
Peak One-Cycle Surge (Non Repetitive) On-State Current (60Hz)	I_{TSM}	18,000	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	16,450	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	500	Amperes/μs
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	200	Amperes/μs
I^2t (for Fusing), one cycle at 60Hz	I^2t	1.4×10^6	A^2sec
Peak Gate Power Dissipation	P_{GM}	10	Watts
Average Gate Power Dissipation	$P_{G(av)}$	3	Watts
Storage Temperature	T_{STG}	−40 to 150	°C
Operating Temperature	T_J	−40 to 125	°C
Mounting Force①		5900 to 7300	lb.
Mounting Force①		2700 to 3300	kg

① Consult recommended mounting procedures.

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT1000A
Phase Control SCR
1000 Amperes Avg/800-2500 Volts

Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	FT1000A	Units
Voltage—Blocking State Maximums				
Forward Leakage, Peak	I_{DRM}	T_J = 125°C, V_{DRM} applied	80	mA
Reverse Leakage, Peak	I_{RRM}	T_J = 125°C, V_{RRM} applied	80	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	I_{TM} = 3200A, T_J = 125°C	2.10	Volts
Switching				
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	T_J = 125°C, V_D = ½V_{DRM}	200	V/μsec
Thermal				
Maximum Thermal Resistance,① double sided cooling Junction to Sink	$R_{\theta JS}$		.025	°C/Watt
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	V_D = 6V, T_J = 25°C, R_L = 2Ω	250	mA
Gate Voltage to Trigger	V_{GT}	V_D = 6V, T_J = 25°C, R_L = 2Ω	2.5	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_J = 125°C, V_D = ½V_{DRM}	.20	Volts
Peak Forward Gate Current	I_{GTM}		4.0	Amperes
Peak Reverse Gate Voltage	V_{GRM}		10	Volts

① Consult recommended mounting procedures.

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT1000A
Phase Control SCR
1000 Amperes Avg/800-2500 Volts

MAXIMUM ON-STATE CHARACTERISTICS

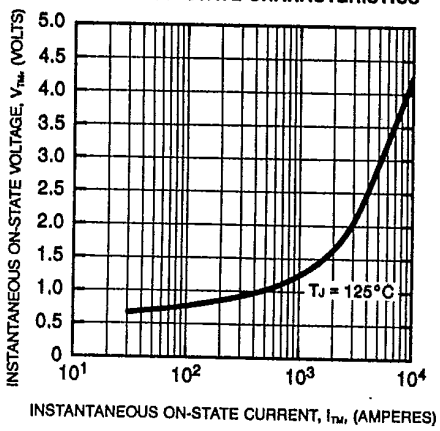

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO SINK)

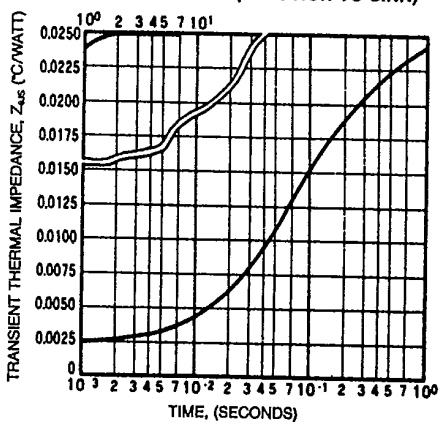

MAXIMUM ALLOWABLE SINK TEMPERATURE (SINUSOIDAL WAVEFORM)

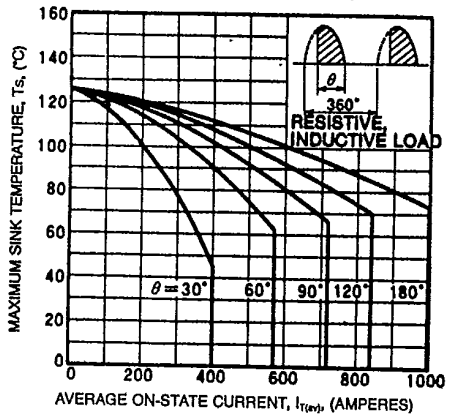

MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)

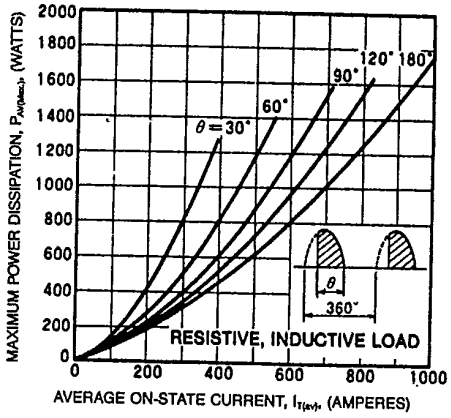

MAXIMUM ALLOWABLE SINK TEMPERATURE (RECTANGULAR WAVEFORM)

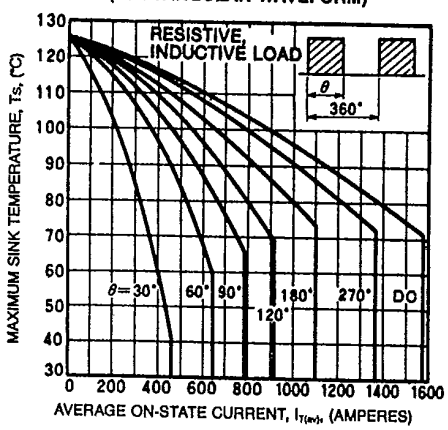

MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

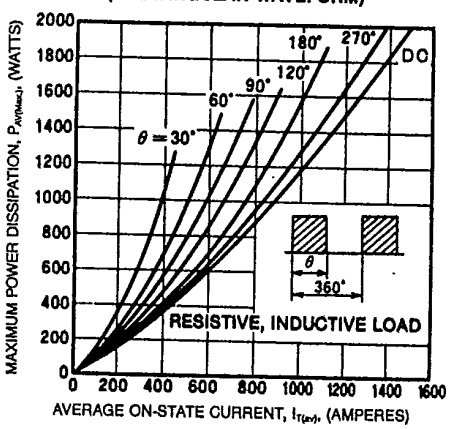

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT1000A
Phase Control SCR
1000 Amperes Avg/800-2500 Volts

MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)

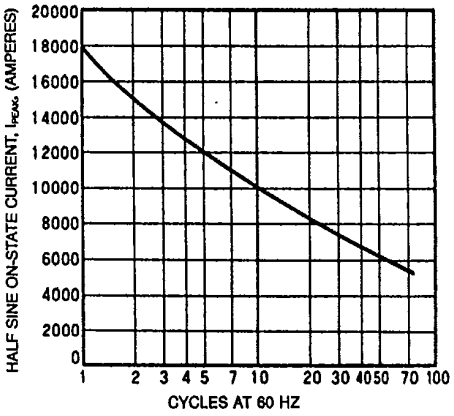

GATE TRIGGER CURRENT (TYPICAL)

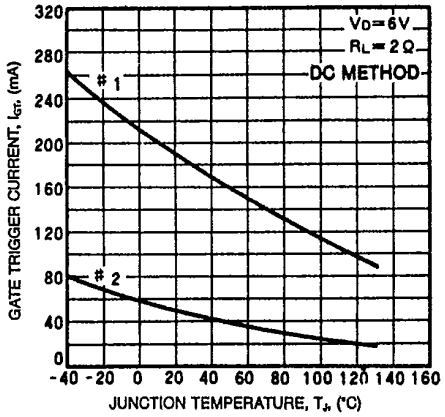

GATE TRIGGER VOLTAGE (TYPICAL)

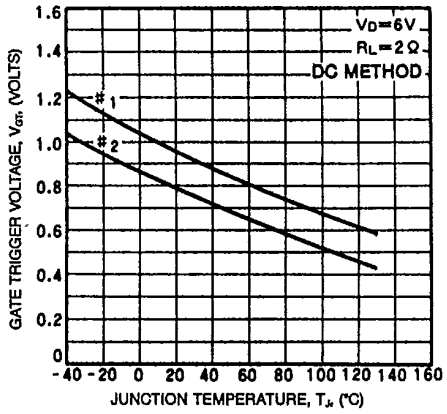

BREAKOVER VOLTAGE (TYPICAL)

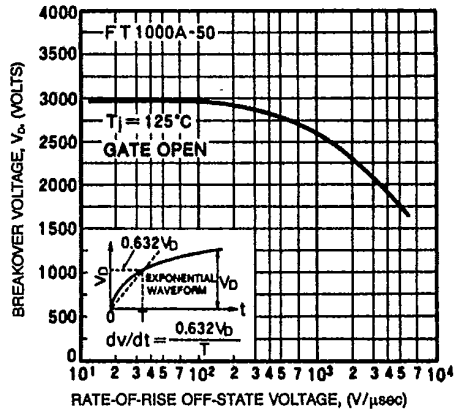

TURN-OFF TIME VS. RATE-OF-RISE

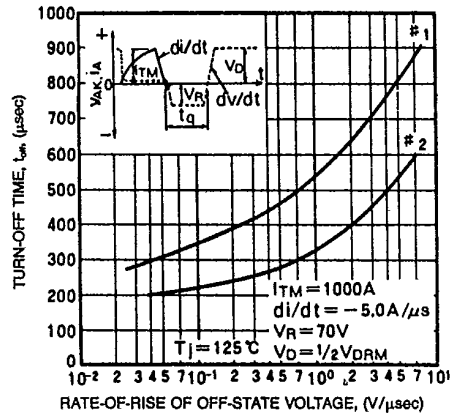

BREAKOVER VOLTAGE vs. JUNCTION TEMPERATURE (TYPICAL)

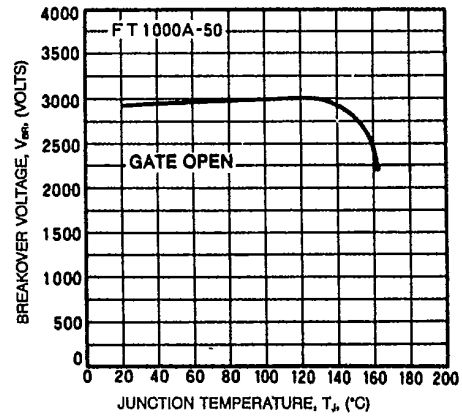

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

FT1000A
Phase Control SCR
1000 Amperes Avg/800-2500 Volts

GATE CHARACTERISTICS